

FORM PTO-11390
(REV. 1-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

00D936US

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

10/009263

INTERNATIONAL APPLICATION NO.

PCT/NZ00/00092

INTERNATIONAL FILING DATE

June 7, 2000

PRIORITY DATE CLAIMED

June 8, 1999

TITLE OF INVENTION

CONTAINER

APPLICANT(S) FOR DO/EO/US

Arthur Frank BOLLEN

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:

Abstract.

Search Report.

Application Data Sheet.

PCT/NZ00/00092

00D936US

CALCULATIONS PTO USE ONLY

ENTER APPROPRIATE BASIC FEE AMOUNT =

\$ 1040

\$ 130

MULTIPLE DEPENDENT CLAIM(S) (if applicable)	+ 280.
---	--------

* TOTAL OF ABOVE CALCULATIONS =

Reduction of 1/2 for small entity

		SUBTOTAL =	
--	--	------------	--

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30

months from the earliest claimed priority date (37 CFR 1.492(f)).

TOTAL NATIONAL FEE =

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be

accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

TOTAL FEES ENCLOSED =

Amount to be refunded:	\$
------------------------	----

charged:	\$
----------	----

a. ☒ A check in the amount of \$ 1,296 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required by 37 CFR 1.16 and 1.17, or credit any overpayment to Deposit Account No. 25-0120. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

December 10, 2001

Young & Thompson
745 South 23rd Street
2nd Floor
Arlington, VA 22202
(703) 521-2297

CUSTOMER NO. 000466

Benoît Castel
SIGNATURE

Benoit Castel

NAME _____

35,041

REGISTRATION NUMBER

PATENTS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Arthur Frank BOLLEN

Serial No. (unknown)

Filed herewith

CONTAINER

PRELIMINARY AMENDMENT

Commissioner for Patents

Washington, D.C. 20231

Sir:

Prior to calculation of the filing fee, please amend
the above-identified application as follows:

IN THE CLAIMS:

Cancel claims 1-29 and add the following new claims:

--30. (new) A container comprising a base, a plurality
of side walls and a top, at least some of the side walls having
ducts therein through which gas can flow.

--31. (new) A container as claimed in claim 30 wherein
four side walls are provided.

--32. (new) A container as claimed in claim 31 wherein
at least two side walls include such ducts.

Arthur Frank BOLLEN

--33. (new) A container as claimed in claim 30 wherein at least one of the top and base include such ducts.

--34. (new) A container as claimed in claim 30 wherein the gas moves up a pair of such walls and down the remaining pair of side walls, the pair pathways crossing each other at the top without intersection of the pathways.

--35. (new) A container as claimed in claim 30 wherein the gas moves up all side walls to the top, the top being apertured so that the gas returns to the base through the body of the container.

--36. (new) A container as claimed in claim 30 the side walls contain apertures on the inner face of the wall through which gas can pass through the body of the container to the base, or to apertures in an opposite side.

--37. (new) A container as claimed in claim 36 wherein the apertures are smaller towards the bottom end in use of the walls and larger towards the top end of the walls in use.

--38. (new) A container as claimed in claim 30 wherein gas moving means are provided in the base of the container.

Arthur Frank BOLLEN

--39. (new) A container as claimed in claim 30 wherein the walls are of a fluted construction so that the flutes provide the ducts.

--40. (new) A container as claimed in claim 30 wherein the base is positioned on a pallet or the base includes a pallet configuration.

--41. (new) A container as claimed in claim 30 wherein the gas comprises a cooled gas.

--42. (new) A container as claimed in claim 30 wherein the gas comprises a heated gas.

--43. (new) A container as claimed in claim 30 wherein the gas comprises air.

--44. (new) A container comprising a base, a plurality of side walls and a top, there being ducts within at least some side walls, and a gas moving device arranged to direct gas through said ducts.

--45. (new) A container as claimed in claim 44 wherein the gas is directed up two side walls and down two side walls.

Arthur Frank BOLLEN

--46. (new) A container as claimed in claim 44 wherein two separate gas paths are provided.

--47. (new) A container as claimed in claim 44 wherein the gas moving means is provided in the base or top and directs the gas to side walls and receives gas from two side walls.

--48. (new) A container as claimed in claim 44 wherein the top includes two chambers or sets of ducts, gas in one gas path passing through one chamber or set of ducts and gas in the other gas path passing through the other.

--49. (new) A container as claimed in claim 44 wherein the base provides a gas receiving chamber and a gas supplying chamber, the gas moving device, moving gas from the gas receiving chamber to the supply chamber.

--50. (new) A container as claimed in claim 44 wherein the top is made from fluted cardboard and the walls are made from fluted cardboard.

--51. (new) A container as claimed in claim 44 wherein the container is insulated.

Arthur Frank BOLLEN

--52. (new) A container as claimed in claim 44 wherein the base chambers formed by first tray open at two side walls, and a second tray open to the other two side walls.

--53. (new) A container as claimed in claim 44 wherein the base is mounted on a pallet.

--54. (new) A container as claimed in claim 52 at least the sides and top are insulated at least on the outer surface.

--55. (new) A method of maintaining the temperature of or cooling a container having a top, a bottom, and a plurality of side walls comprising the steps of directing a flow of gas at the desired temperature up or down through one or more sides of the container and allowing the gas to return down or up through other side walls, or through the body of the container.

--56. (new) A method as claimed in claim 55 wherein the gas moves up two side walls and down two side walls.

Respectfully submitted,

YOUNG & THOMPSON

By



Benoit Castel
Attorney for Applicant
Registration No. 35,041
745 South 23rd Street
Arlington, VA 22202
Telephone: 703/521-2297

December 10, 2001

6/p.b.

CONTAINER**TECHNICAL FIELD OF THE INVENTION**

This invention relates to a container which has been devised particularly though not necessarily solely for the transport of fresh produce such as vegetables, fruit, fish and meat. It is envisaged
5 however that other items such as semiconductors and the like could also be transported in the containers of the invention.

BACKGROUND ART

Accurate temperature control during the transportation of perishable products in a container is important in order to maximise their storage or shelf life. Distribution of temperature controlled
10 air within a transport vehicle or storage facility is an important feature of the refrigeration system.

The smaller the transport or storage container the greater its surface area is in relation to its volume. Heat is gained by transfer through the walls of the transport container. The smaller the
15 container, the greater percentage of its cargo volume that is in contact with or in close proximity to the containers' walls (the surface area) thus making it harder to refrigerate.

The means by which temperature controlled air is circulated within a transport container is vitally important in order to avoid hot spots developing in the perishable cargo. The most
20 common methods of air circulation used in refrigerated transport systems is either bottom air delivery or top air delivery into the container.

Typically the refrigeration plant is mounted at one end of the transport vehicle. Air is cycled through heat transfer coils, then passes into a single air duct entering the cargo area, either along

the containers' floor or roof, and returns through a single inlet, also located at the machinery plant end of the transport vehicle, but usually at the opposite side to the outlet duct. For example, in a refrigerated sea container, if the outlet duct is positioned near the floor of the cargo area then the inlet duct would be positioned near the roof of the cargo area. The air distribution cycle is continuous during the refrigeration process.

For refrigerated trucks and sea containers this method is considered by operators to be satisfactory. Variations in perishable products temperature measured at different locations within transport vehicles are commonly acknowledged but generally within acceptable limits for the trade.

Applying the same air distribution system to smaller containers, (the size of a loaded pallet) has not been successful due to a larger percentage of the perishable cargoes' volume being in contact or in close with, or close proximity to the containers' walls.

OBJECT

It is therefore an object of the present invention to provide a container which will go at least some way towards obviating or minimising the foregoing disadvantages in a simple yet effective manner or which will at least provide the public with a useful choice.

DISCLOSURE OF INVENTION

Accordingly in one aspect the invention consists in a container comprising a base, a plurality of side walls and a top, at least some of the side walls having ducts therein through which gas can flow.

In a further aspect the invention consists in a container comprising a base, a plurality of side walls and a top, there being ducts within at least some side walls, and a gas moving device arranged to direct gas through said ducts.

In a still further aspect the invention consists in a method of maintaining the temperature of or cooling a container having a top, a bottom, and a plurality of side walls comprising the steps of directing a flow of gas at the desired temperature up or down through one or more sides of the container and allowing the gas to return down or up through other side walls, or through the body of the container.

To those skilled in the art to which the invention relates, many changes in construction and widely differing embodiments and applications of the invention will suggest themselves without departing from the scope of the invention as defined in the appended claims. The disclosures and the description herein are purely illustrative and are not intended to be in any sense limiting.

BRIEF DESCRIPTION OF DRAWINGS

One preferred form of the invention will now be described with reference to the accompanying drawings in which:

- Figure 1** is an exploded third angle view showing the base of a container according to the invention;
- Figure 2** is a cross sectional view of the lower end of a container according to one preferred form of the invention;
- Figure 3** is a slightly exploded view of a junction between a wall and the base of the container of Figures 1 and 2;
- Figure 4** is a diagrammatic representation of the walls and top of a container according to the invention;
- Figure 5** is a corner detail of the container of the invention;
- Figure 6** is an enlarged view of the end of a fluted side wall according to the invention;

Figure 7 is a simplified drawing of an arrangement of the sides of the invention;

Figure 8 show gas paths across the top of the container in the preferred form of the invention;

Figure 9 as for Figure 8;

5 Figure 10 shows the arrangement of a preferred form of top for the container;

Figure 11 shows a top corner connector for a preferred container;

Figure 12 shows a cross section of the connector of Figure 11;

Figure 13 is a corner assembly for the container of the invention;

Figure 14 shows Figure 13 in exploded form;

10 Figure 15 shows the detail of the junction between the side walls and the base of one intersection thereof being the gas receiving intersection to the base;

Figure 16 is a similar detail but showing the gas supply intersection between the base and the side walls;

15 Figure 17 is a diagrammatic side elevation of an alternative embodiment of a container according to the invention;

Figure 18 is a diagrammatic perspective view of the container of Figure 17;

Figure 19 shows a further alternative container according to the invention;

Figure 20 shows a still further alternative container according to the invention; and

Figure 21 (a) to (n) is a series of drawings showing an erection sequence of a container.

BEST MODE FOR CARRYING OUT THE INVENTION

Referring to Figures 1 to 16, a container is provided as follows:

The container comprises a base, a top and a plurality, preferably four, side walls. The base may be mounted on a pallet 1. Means are provided to move gas in a manner that will be described in more detail hereinafter and the means may be in the base or the top. In the preferred form the gas moving device is in the base. In such a construction the base comprises two parts being a lower part 2 and an upper part 3. In one preferred form of the invention gas will be moved upwardly and within two side walls of the container and downwardly and within two side walls. Other variations are able to be provided such as up one side and down one side, up three side walls and down one or up one and down three. Other alternative, include up four walls and down through the body of the container and allowing the gas to enter the body of the container at various points up the side walls. In the up two walls, down two walls version the lower part 2 is provided with a base 4 and perimeter walls 5 are provided on the base 4. The upper part 3 has a base 7 and walls 8 and 9 on the two edges thereof. The base 7 of the upper part 3 has a central aperture 10 through which gas can pass. The other two sides of the base 7 may have a curved side wall 11 thereabouts to assist in directing the in gas flow in use. The sides of the base 4 also carry a curved wall so that the side of base 4 which carry a curved wall 12 sit under sides of base 7 which do not carry a curved wall. A gas moving device such as a radial fan 13 is provided to move gas through the central aperture 10. A top plate 14 is provided above the upper part 3 so that in effect upper and lower plenum chambers are provided in the base along with the gas moving device. A layer of insulation 15 may be provided between the base and the pallet as shown in Figures 1 and 3. The base 9 may rest on notched vanes 16 carried on the inside of walls 5. The vanes 16 also direct air evenly into the duct. The base 9 and top plate 14 are also supported by spacers 17 through which bolts 18 pass to secure the construction by use of nuts 19.

The walls of the container comprise walls 20, 21, 22 and 23 of which one for example the wall 23 may be in the form of a door. Thus the side walls 21 and 23 for example may be wider than walls 20 and 22 so that walls 21 and 23 overlap the ends of the side walls 20 and 22 as can be seen in

Figure 7. In the preferred form of the invention the walls are made from fluted cardboard and a satisfactory cardboard is correctly provided by Carter Holt Harvey Limited and sold under the trade mark M FLUTE. This board provides sufficient rigidity and also provides flutes which form ducts along which the gas for example air can pass. In the construction as shown in Figure 5 the wall 20 butts against a face of the wall 21 and a tape 25 is passed vertically and around the corners to hold the walls in position. The container is also usually wrapped in plastic wrap. In Figure 6 the wall 21, for example, is shown it can be seen that the outer surface has a double thickness of cardboard at 26 and that the inner wall 27 has been extended around the end of the wall 28 and secured back to the outer surface at 29.

The top includes one or more chambers and a satisfactory construction is substantially as shown in Figure 10 in which two layers of the fluted cardboard are provided being layers 30 and 31 in which the flutes 32 and 33 are substantially at right angles. This keeps the air flows separate and enables the air to pass up one wall such as wall 20 through flutes such as flutes 33 and down the other side wall such as side wall 22. It will be apparent of course that a single plenum could be provided or two plenum chambers without the flutes but it is believed that the preferred embodiment comprises the construction as shown in Figure 10. Figure 11 shows one way of completing gas passageways from say wall 20 to top part 30. A connector 45 is provided having gas passageways 48 between face 46 and face 47. There may be dividers 49 within the passageways 48. The faces 46 and 47 are recessed at 50, 51 to provide a female member into which the side panel 20 and top panel 30 engage. Other connections can be similarly made. An alternative method is simply to "V" notch a length of cardboard in two places so that the length folds up to form a pair of sides separated by a top with the flutes aligning at the folds. The embodiment in Figure 9 shows this type of construction.

Thus by reference to Figure 8 air passes up wall 20 into top part 30 and down walls 22. Figure 13 shows the corner assembly which it can be seen that the flutes in wall 20 terminate at a lower level than the flutes in wall 21 and the extension 35 can be seen. The inner face of the walls could have the cardboard replaced by material which transfers heat more readily but which gives sufficient strength such as a metal sheet for example although this has the disadvantage that the

container walls may not be so readily disposed of at the receiving end. Also an array of holes could be provided on the gas supplying and gas receiving walls so that the gas passes through the produce rather than over the top or as well as through the top. Such a construction is of particular
5 advantage when the produce is horticultural items. In such a construction selected pathways can be blocked to force flow through the produce.

Air flows up two opposite sides and down the remaining two opposite sides are also possible.

10 That is the air flow is across a corner.

Referring to Figures 15 and Figures 16 it can be seen that air will return down the side flutes for example wall 23 in the direction of arrow 40. The gas moving device 13 such as a radial fan will move that gas through the aperture 10 into the lower chamber where it is enabled to move up the
15 flutes in wall 21.

In one base chamber a refrigeration unit (not shown) or heating unit is provided. It is expected that usually a cooling unit will be provided, but a heating unit may be used, or both heating units and cooling units can be provided.

20 In use the door 23 is opened and produce or items stacked within the container. The door 23 is closed and insulation panels 50 indicated in Figure 2 and 3 are placed about the container. These are then taped so as to be secure in position and a tape is indicated at Figure 51. Other fixing devices could be used as available.

25 Once closed the container of the invention may be shipped as desired for example within a shipping container or individually as suitable.

Power is supplied to the gas moving device 13 and air (or other gas if utilised) is moved up to or in some cases one or three side walls across the top of the container (unless blocked to direct the
30 flow through the produce) and down the remaining two or three or one side walls back into the

base. It will be apparent that the roles of the base and top could be reversed in some instances although having the cooling and gas moving functions in the base enables it is believed a simpler construction. The construction has the advantage of shipping a collapsible container on a pallet.

- 5 In summary this embodiment of the invention in a preferred form could be described as a pallet base, with internal air plenums, a fan, four side walls and one horizontal roof wall. The walls contain air ducts. The fan forces air up two walls, across the roof, down two walls and back to the fan thus completing the air distribution cycles. This unique configuration enables two independent air cycles to work at 90 degrees to each other. Because the air is evenly forced
10 through all the walls, heat transfer through the container walls is controlled accurately. This is ideal for non-respiring perishable products such as meat, which is typically packaged in boxes which do not contain air vents.

- This construction forms essentially a cool gas "blanket" about the produce and is particularly
15 suitable for meat products which give off little or no heat while stored and/or transported. The "blanket" in effect insulates the contents in the container from the outside ambient air.

- For perishable horticultural products which respire and give off heat, it is necessary for the temperature controlled air to flow through the vents in the product boxes and around and/or
20 across the product to take away the heat and control the product's temperature accurately. In this case either of the following air distribution options could be used.

Up through one side wall and across to its opposite side wall as shown in Figures 17 and Figure
18.

- 25 In this form of the invention, air is forced from the fan, up one wall 60, through apertures 61 located within its inner wall 62 (on the cargo side), through the cargo and across to its opposite side wall 63, through holes 64 located in the inner wall of the second or opposite side wall, and through this wall back to the fan.

30

In this embodiment the aperture 61 should, in area, be less than, or at most, equal to the area of the input to the ducts. If the total area is close to the input area then desirably upper apertures should be larger than lower apertures. When the aperture area is much less, such graduation is less necessary.

Up four walls and down through the cargo, as shown in Figure 19.

An alternative form of the invention provides an air circulation system that enables the air to travel up each of the four walls 70 to the top of the loaded pallet, into a plenum, not shown in Figure 19, but referenced 71 in Figure 20.

Apertures 72 would be provided in plate 14 to maintain even air flow distribution. In an alternative embodiment an apertured plate (not shown) could be placed near the top of the walls to form a plenum chamber through which the air passes.

Up the cargo and down through one or more side walls, as shown in Figure 20.

In yet another form of the invention air is forced from the fan up through a plenum 80 located underneath the cargo 81, up through the cargo and returns down and through one or more walls 82 back to the fan.

This construction is essentially the reverse of the construction of Figure 19 in respect of the air flow direction.

Figure 21 part (a) to (n) shows an assembly sequence of the construction.

In Figure 21 (a) the parts of the container are shown arriving. In 21 (b) produce is stacked onto a pallet 1, and in (c) the produce is optionally wrapped for example using shrink film.

In (d) to (f) the first of the gas directing panels is folding into shape and in (g) is placed over the produce. In (h) the second panel also folded is placed over the first panel and these are sealed at (i). In (j) to (l) a similar procedure is followed with insulation panels which also extend over the
5 pallet 1. The box may be wrapped in shrink film at this stage to seal gaps between cardboard. Alternatively a bag could be used. Drawings (m) to (n) show the loaded container of the invention being lifted and loaded into a larger shipping container. This construction is for an embodiment where gas passes up two sides, across the top and down the other two sides. The air paths at the top cross over but are not intersecting.

10

Thus it can be seen that a container is provided which at least in the preferred forms, allows cargo to be cooled (or heated, if the refrigeration plant is replaced with a heater) in a manner such that hot spots (or cool spots) are minimised even with small containers.

CLAIMS:

1. A container comprising a base, a plurality of side walls and a top, at least some of the side
5 walls having ducts therein through which gas can flow.
2. A container is claimed in claim 1 wherein four side walls are provided.
3. A container as claimed in claim 2 wherein at least two side walls include such ducts.
10
4. A container as claimed in any one of claims 1 to 3 wherein at least one of the top and base
include such ducts..
5. A container as claimed in any one of the preceding claims wherein the gas moves up a pair
15 of such walls and down the remaining pair of side walls, the pair pathways crossing each
other at the top without intersection of the pathways.
6. A container as claimed in any one of claims 1 to 4 wherein the gas moves up all side walls
20 to the top, the top being apertured so that the gas returns to the base through the body of the
container.
7. A container as claimed in any one of claims 1 to 4 the side walls contain apertures on the
inner face of the wall through which gas can pass through the body of the container to the
25 base, or to apertures in an opposite side.
8. A container as claimed in claim 7 wherein the apertures are smaller towards the bottom end
in use of the walls and larger towards the top end of the walls in use.
9. A container as claimed in any one of the preceding claims wherein gas moving means are
30 provided in the base of the container.

10. A container as claimed in any one of the preceding claims wherein the walls are of a fluted construction so that the flutes provide the ducts.
- 5 11. A container as claimed in any one of the preceding claims wherein the base is positioned on a pallet or the base includes a pallet configuration.
12. A container as claimed in any one of the preceding claims wherein the gas comprises a cooled gas.
- 10 13. A container as claimed in any one of claims 1 to 11 wherein the gas comprises a heated gas.
14. A container as claimed in any one of the preceding claims wherein the gas comprises air.
- 15 15. A container comprising a base, a plurality of side walls and a top, there being ducts within at least some side walls, and a gas moving device arranged to direct gas through said ducts.
16. A container as claimed in claim 15 wherein the gas is directed up two side walls and down two side walls.
- 20 17. A container as claimed in claim 15 or claim 16 wherein two separate gas paths are provided.
- 25 18. A container as claimed in any one of claims 15 to 17 wherein the gas moving means is provided in the base or top and directs the gas to side walls and receives gas from two side walls.
- 30 19. A container as claimed in any one of claims 15 to 18 wherein the top includes two chambers or sets of ducts, gas in one gas path passing through one chamber or set of ducts and gas in the other gas path passing through the other.

20. A container as claimed in any one of claims 15 to 19 wherein the base provides a gas receiving chamber and a gas supplying chamber, the gas moving device, moving gas from the gas receiving chamber to the supply chamber.
21. A container as claimed in any one of claims 15 to 20 wherein the top is made from fluted cardboard and the walls are made from fluted cardboard.
22. A container as claimed in any one of claims 15 to 21 wherein the container is insulated.
23. A container as claimed in any one of claims 15 to 22 wherein the base chambers formed by first tray open at two side walls, and a second tray open to the other two side walls.
24. A container as claimed in any one of claims 15 to 23 wherein the base is mounted on a pallet.
25. A container as claimed in claim 22 at least the sides and top are insulated at least on the outer surface.
26. A method of maintaining the temperature of or cooling a container having a top, a bottom, and a plurality of side walls comprising the steps of directing a flow of gas at the desired temperature up or down through one or more sides of the container and allowing the gas to return down or up through other side walls, or through the body of the container.
27. A method as claimed in claim 26 wherein the gas moves up two side walls and down two side walls.
28. A container substantially as herein described with reference to the accompanying drawings.

29. A method as claimed in claim 26 and substantially as herein described with reference to the accompanying drawings.

1/6

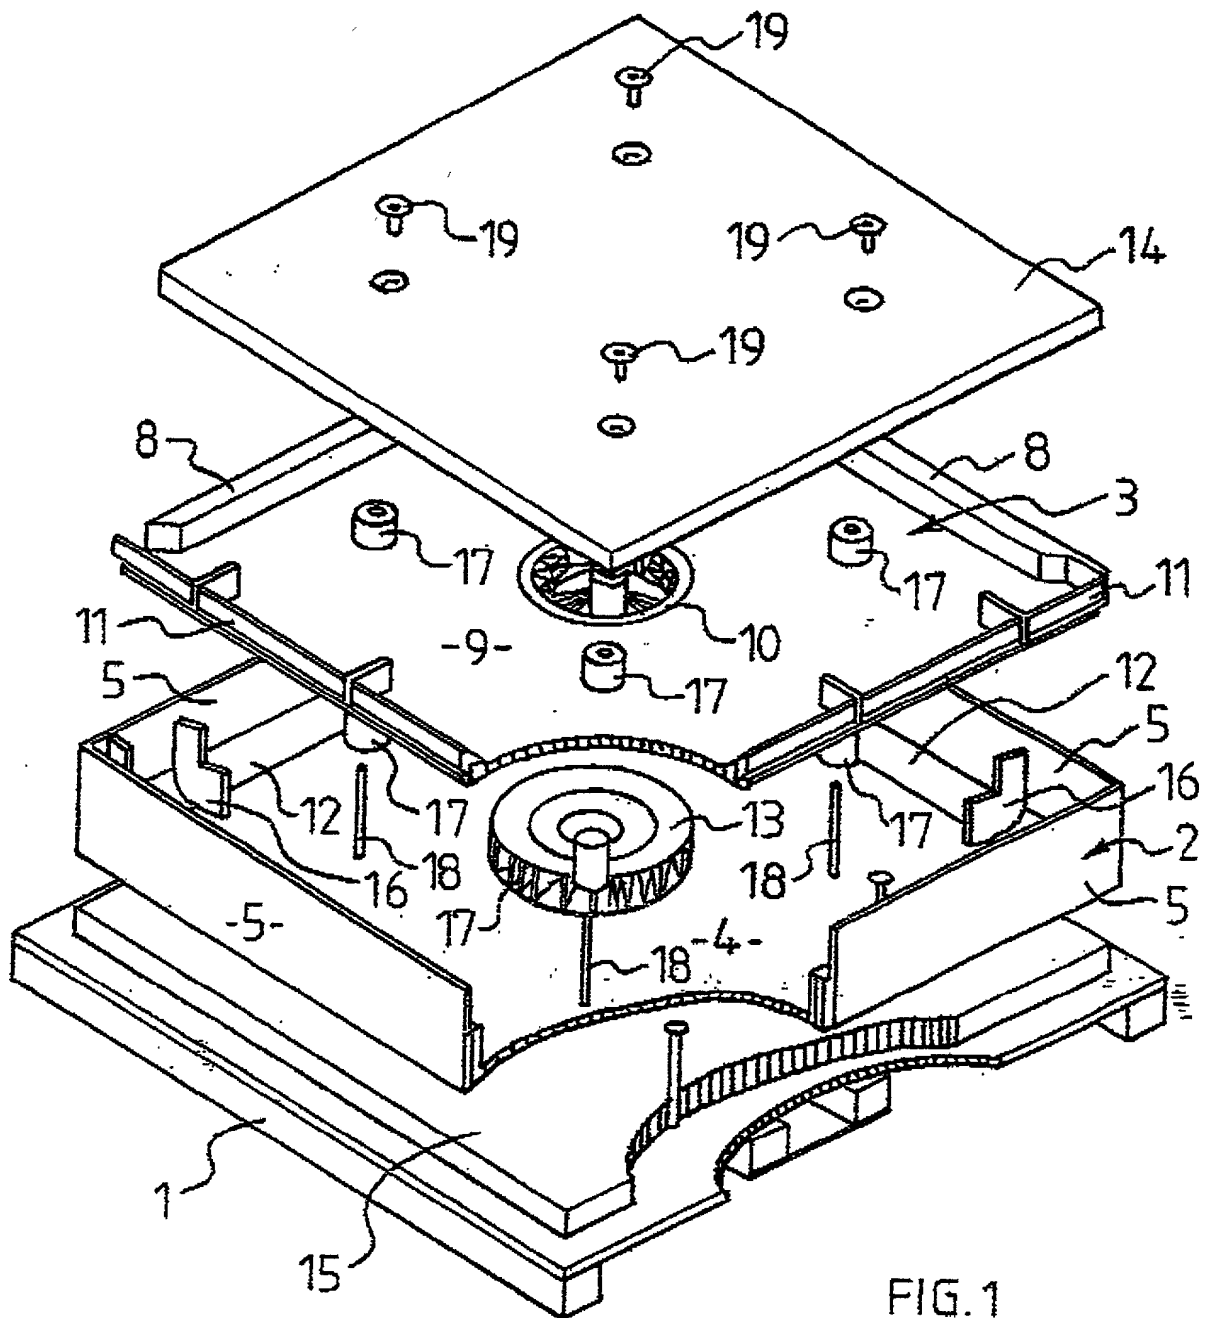


FIG. 1

1009263 031402

2/6

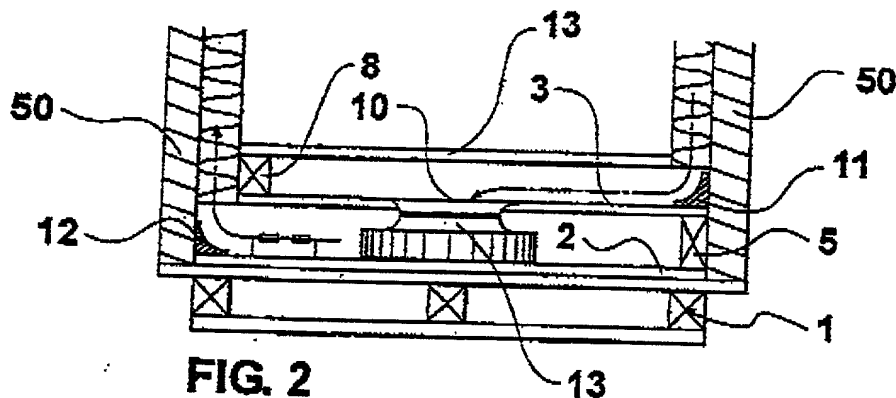


FIG. 2

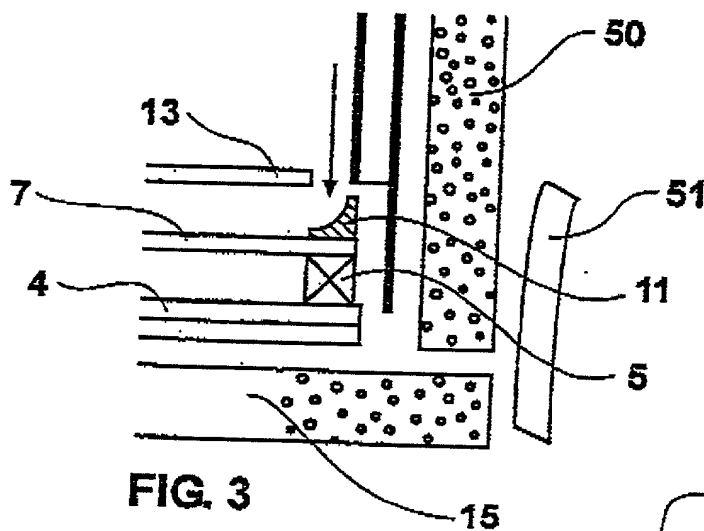


FIG. 3

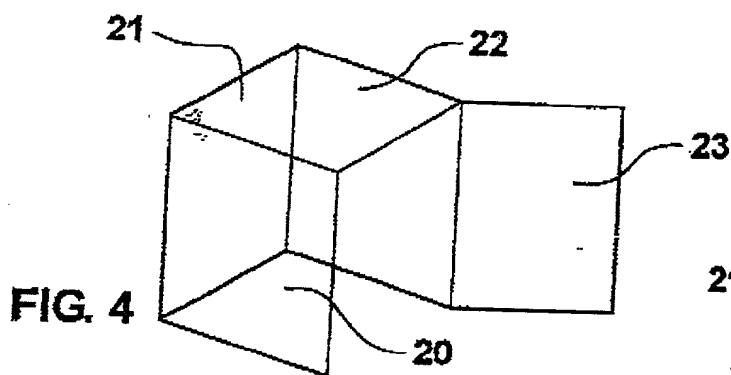


FIG. 4

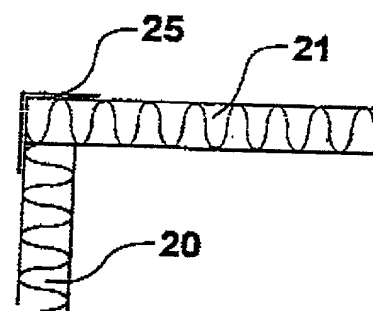


FIG. 5

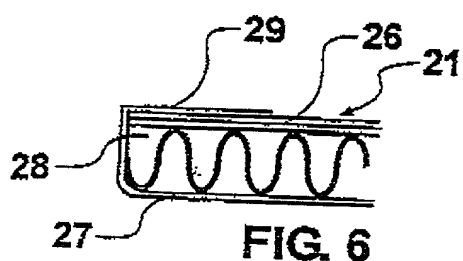


FIG. 6






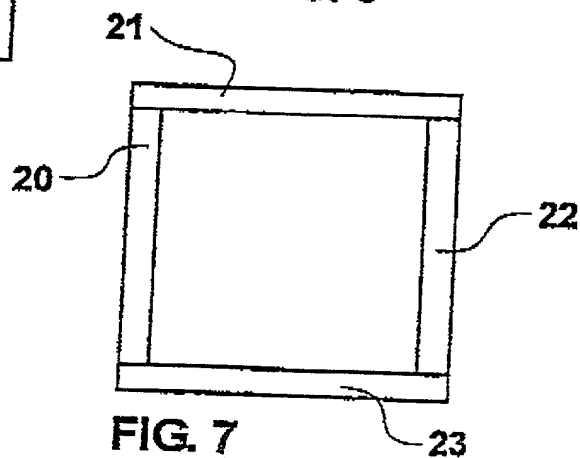


FIG. 7

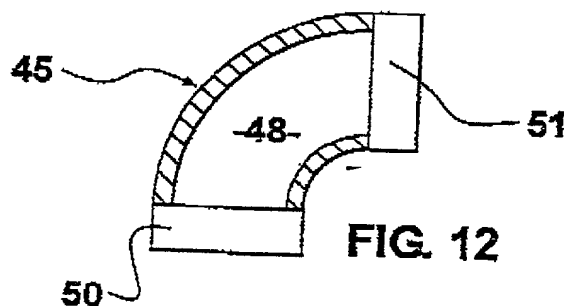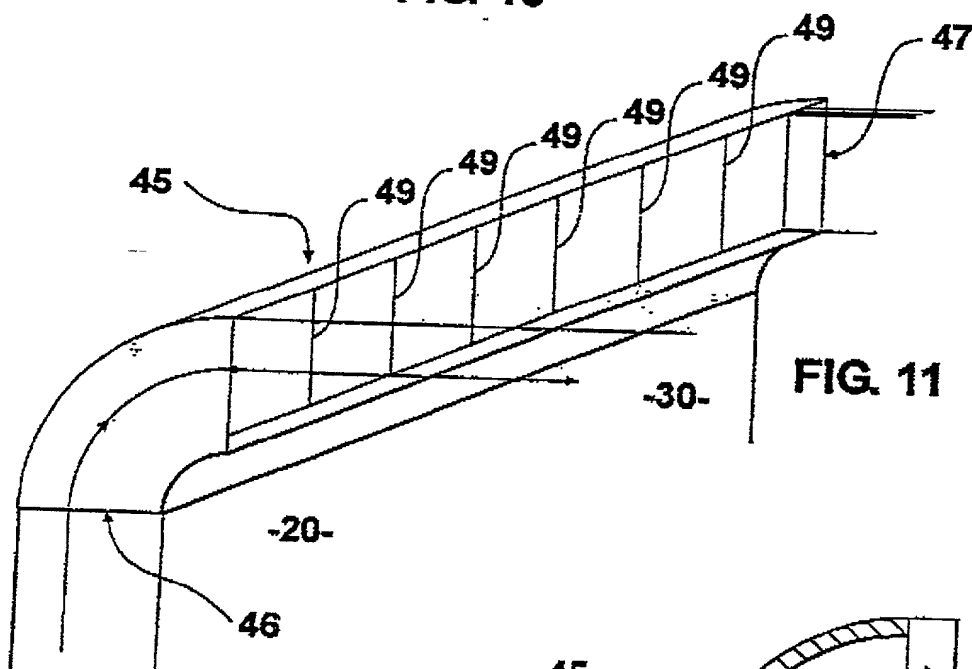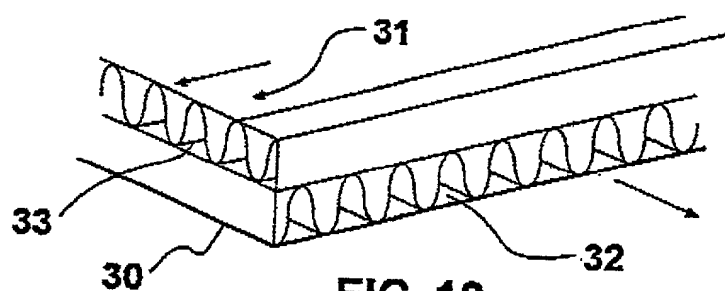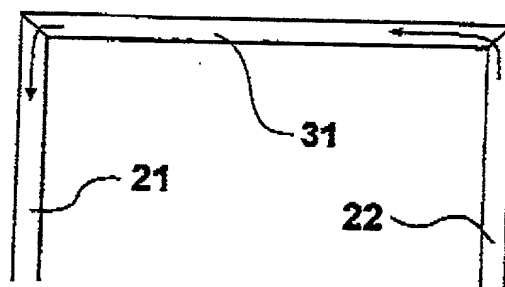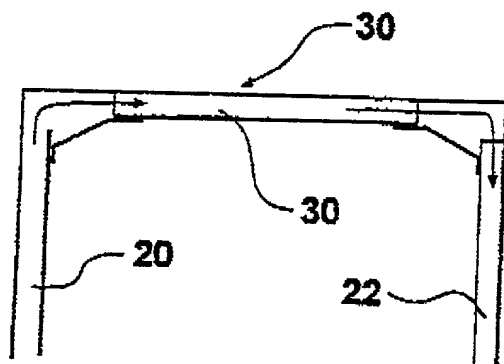

4/6

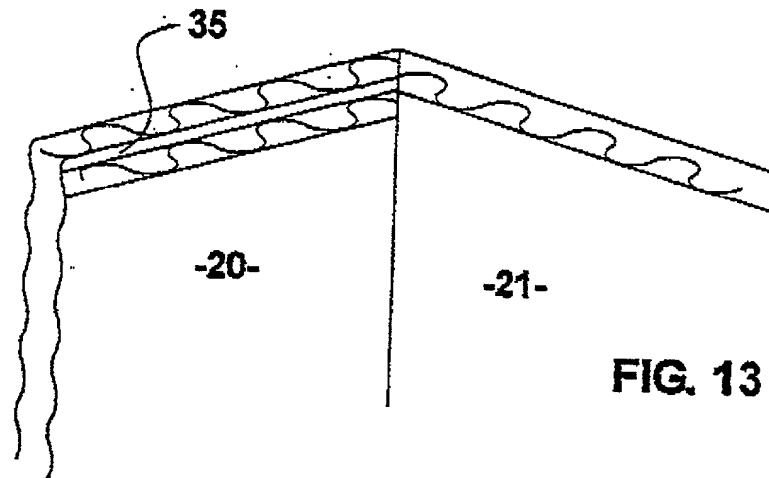


FIG. 13

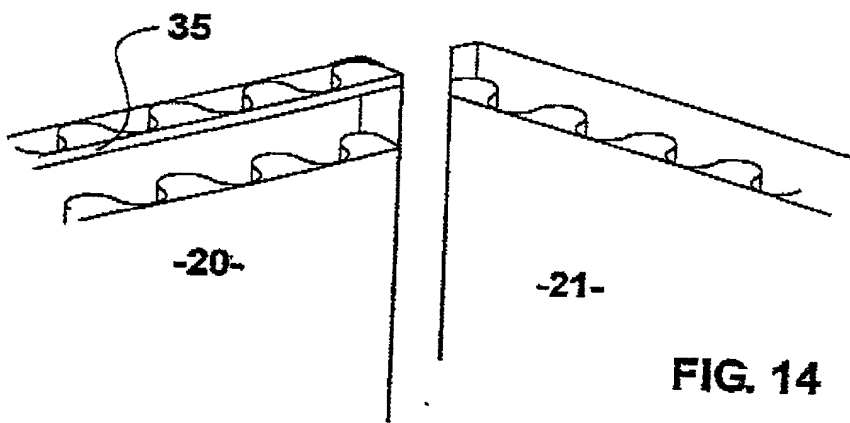


FIG. 14

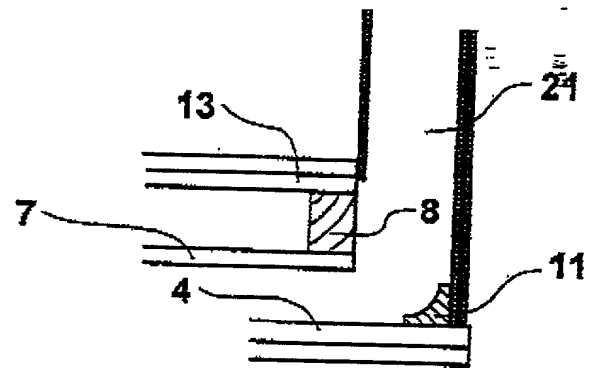


FIG. 16

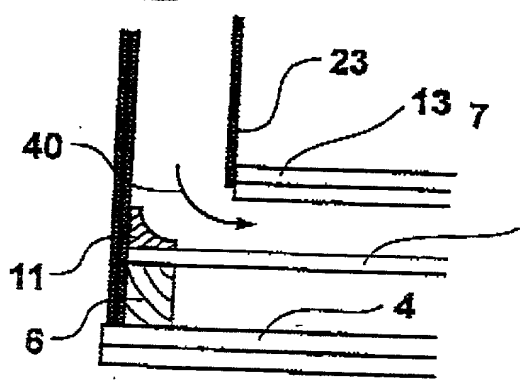


FIG. 15

1005330340
 2075041-225007

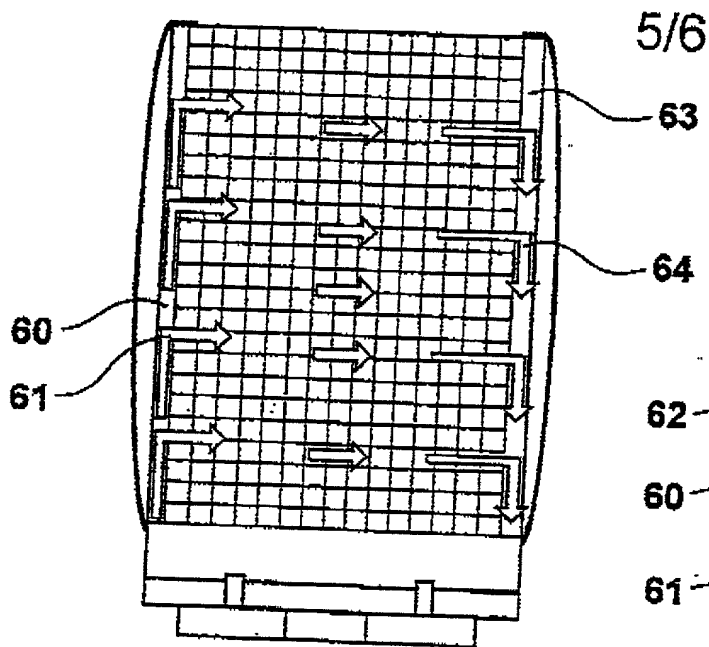


FIG. 17

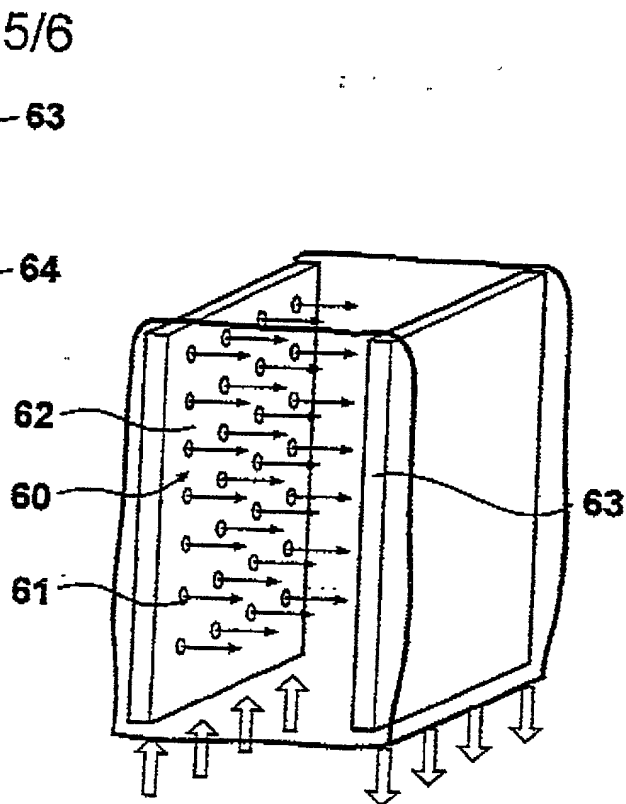


FIG. 18

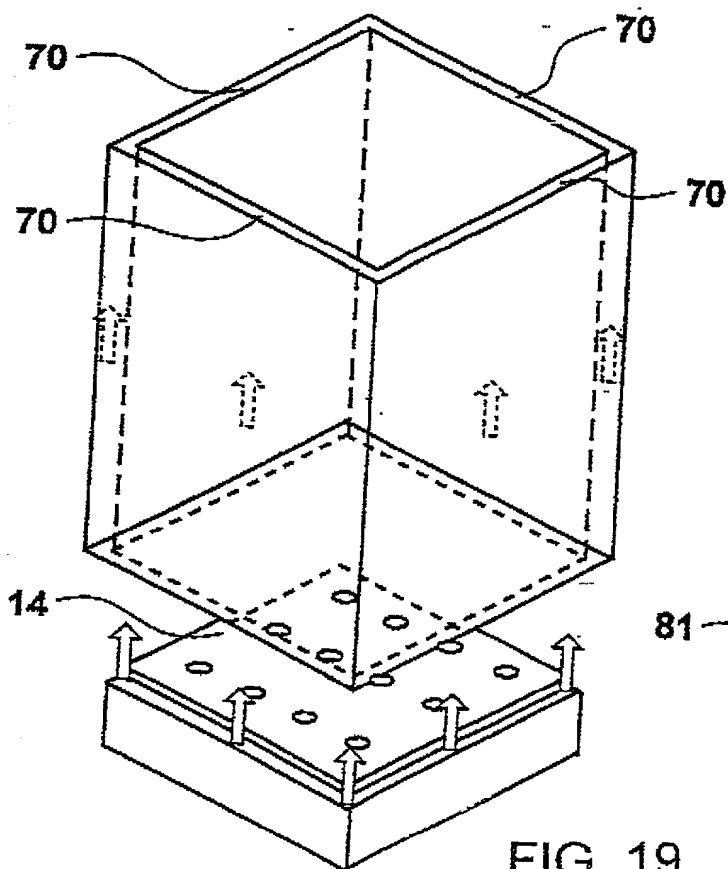


FIG. 19

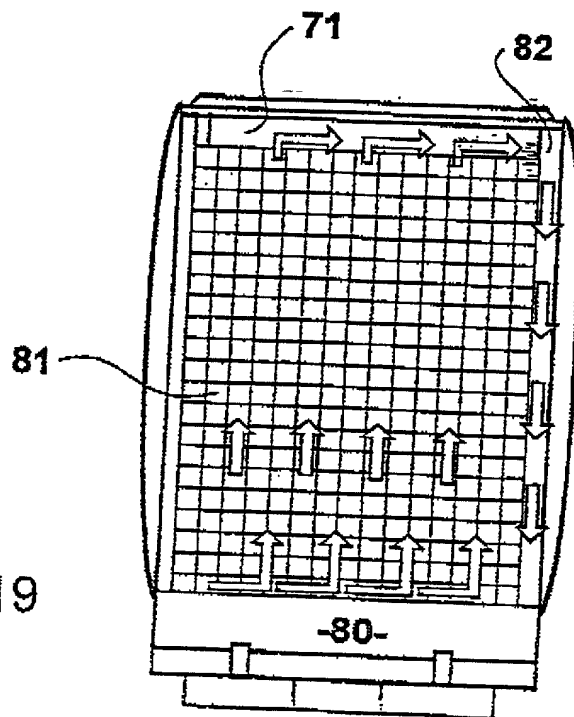


FIG. 20

1009263.03102

6/6

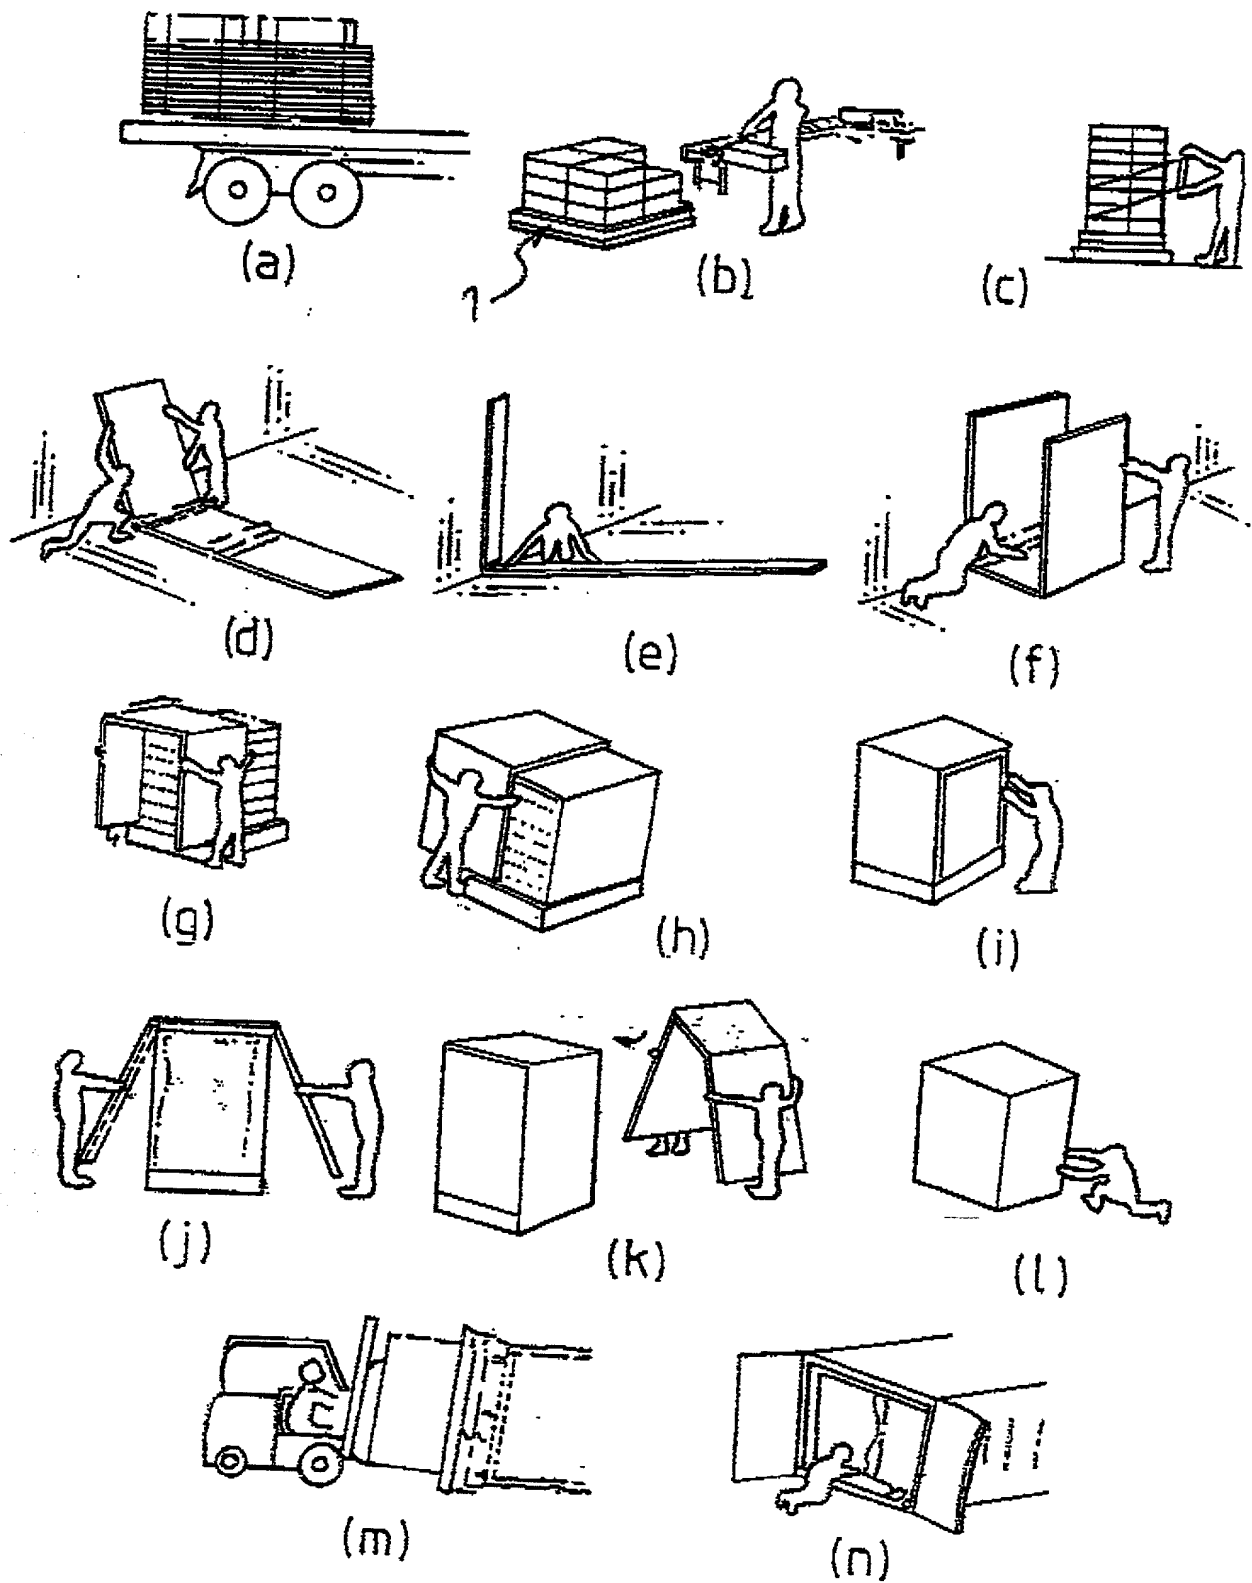


FIG. 21

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

CONTAINER

the specification of which: *(check one)*

REGULAR OR DESIGN APPLICATION

☐ is attached hereto.

☒ was filed on December 10, 2001, as application Serial No. _____ and was amended on _____ (if applicable).

PCT FILED APPLICATION ENTERING NATIONAL STAGE

☒ was described and claimed in International application PCT/NZ00/00092 filed on June 7, 2000, and as amended on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

PRIORITY CLAIM

I hereby claim foreign priority benefits under 35 USC 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

PRIOR FOREIGN APPLICATION(S)

Country	Application Number	Date of Filing (day, month, year)	Priority Claimed
New Zealand	336144	8 June 1999	yes

(Complete this part only if this is a continuing application.)

I hereby claim the benefit under 35 USC 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 USC 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status--patented, pending, abandoned)

POWER OF ATTORNEY

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from **Piper Knowles** as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

As a named inventor, I hereby appoint the registered patent attorneys represented by Customer No. **000466** to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, including: **Robert J. PATCH, Reg. No. 17,355, Andrew J. PATCH, Reg. No. 32,925, Robert F. HARGEST, Reg. No. 25,590, Benoît CASTEL, Reg. No. 35,041, Eric JENSEN, Reg. No. 37,855, Thomas W. PERKINS, Reg. No. 33,027, and Roland E. LONG, Jr., Reg. No. 41,949,**

c/o YOUNG & THOMPSON,
Second Floor,
745 South 23rd Street,
Arlington, Virginia 22202.



00466

PATENT TRADEMARK OFFICE

Address all telephone calls to Young & Thompson at 703/521-2297. Telefax: 703/685-0573.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: **Arthur Frank BOLLEN**
(given name, family name)

Inventor's signature 

Date 23/1/02

Residence: **Ngahinapouri, New Zealand** **NZX**

Citizenship: **New Zealand**

Post Office Address: **Old School Road,
Ngahinapouri, New Zealand**